

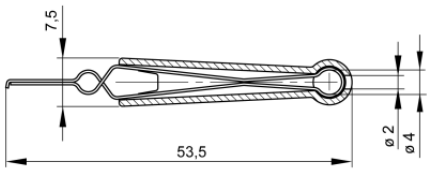


Crocodile clips

AGF 2



Product	AGF 2
description	Extra-fine alligator clip, particularly suited for gripping densely packed extremely small contact points. Contact tongues insulated on the outside to prevent short circuits. Plug connection through 2 mm and 4 mm diameter connectors.
operating instruction	BA420
article-no. / *colour	9312721xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  00 black </div> <div style="text-align: center;">  01 red </div> </div>
drawing	
technical data	
connection	unsprung socket 4 mm
rated voltage ⁽¹⁾	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O ⁽³⁾
rated current ⁽¹⁾ (consider derating curve)	6 A
material socket	brass, nickel plated
housing material	PVC-P
temperature range acc. To IEC61010 ⁽²⁾	-25 °C to +70 °C
clamping range	4 mm

4 mm system

⁽¹⁾ for normal environmental conditions 5°C to 40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges

⁽³⁾ without rated measurement category, for other circuits that are not directly connected to mains

stand: 21.06.2022