





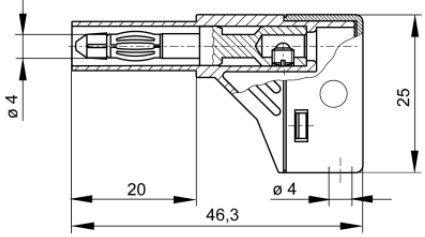


## Plugs

### LAS S W



Product	LAS S W
description	Safety angled connector with screw connection for leads from 0.5 mm <sup>2</sup> to 1.5 mm <sup>2</sup> , outer diameter of lead max. 4.2 mm. Plug 4 mm with caged spring, 1000 V-system, IEC 61010. Simple assembly by "Click-System".
operating instruction	BA460
article-no. / *colour	9340981xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> 00 black</div> <div style="text-align: center;"> 01 red</div> <div style="text-align: center;"> 02 blue</div> <div style="text-align: center;"> 03 yellow</div> <div style="text-align: center;"> 04 green</div> </div> <div style="text-align: right; border: 1px solid black; padding: 2px; margin-top: 5px;">Ni</div>
drawing	
<b>technical data</b>	
connection	screw terminal
rated voltage <sup>(1)</sup>	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT III
rated current <sup>(1)</sup> (consider derating curve)	24 A
material plug	brass, nickel plated
housing material	PA
temperature range acc. To IEC61010 <sup>(2)</sup>	-15 °C to +70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	V-2

4 mm safety system

<sup>(1)</sup> for normal environmental conditions 5°C to 40°C

<sup>(2)</sup> contact the manufacturer for applications at deviating temperature ranges

stand: 21.06.2022