

PowerWalker VI 600 SW/FR

Line-Interactive UPS

600VA Line-Interactive UPS with pure Sine Wave

2x French, RJ-11 and RJ-45 Surge Protection


USB Connection for monitoring

LCD display for status view

Built-in boost and buck AVR function



Item-No. 10120085

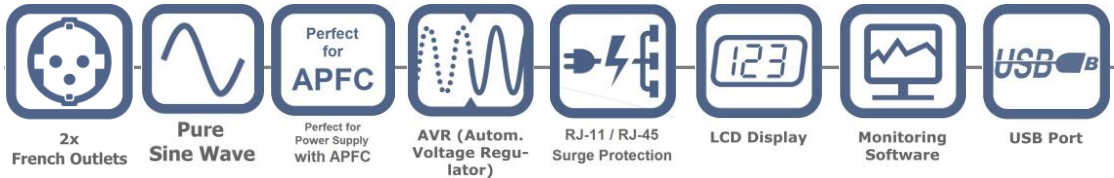

Product Features

With its digitalized PWM-based controller PowerWalker VI 600 SW provides a pure sine wave output especially best suitable to protect modern PC like mini servers, gaming PC, point of sale (POS) systems and other electronic devices with APFC power supplies. Not only limited to APFC power supplies and equipped with a voltage stabilizer, this UPS will continue providing clean and stable power to connected equipment and is perfect for any home or small and medium office application.

- Pure Sine Wave
- Super smart charger to shorten charging time
- Built-in boost and buck AVR
- Auto restart while AC is recovering
- Off-mode charging
- Cold start function
- USB communication port
- RJ-11, RJ-45 surge protection
- Monitoring software included
- LCD display for status view



Backsite view



LCD Display



USB port, RJ-11, RJ-45 surge Protection

Technical Details

Product Features

Capacity	600VA / 360W
-----------------	--------------

Input

Voltage	220/230/240VAC
Voltage Range	162-290VAC

Output

Voltage	220/230/240VAC
Voltage Regulation (Battery Mode)	± 10 %
Frequency	50 or 60Hz
Freq. Regulation (Battery Mode)	± 1 Hz (Battery Mode)
Waveform	Pure Sine Wave

Transfer Time

Typical	2-6ms
----------------	-------

Battery

Type	12V / 7Ah
Quantity	1x
Recharge Time	4h to 90%

LCD Display

Indicators	AC mode, Battery mode, Load level, Battery capacity, Input voltage, Output voltage, Overload alarm, Fault alarm and Low battery alarm
-------------------	---

Audio Indicators

Battery Mode	Beep every 10 sec
Low Battery	Beep every second
Fault	Continuous Beep
Battery is faulty	Beep every 2 sec
UPS overload	Beep 2 times per second

Full Protection

Discharge	Yes
Overcharge	Yes
Overload	Yes
Short circuit	Yes

Connections

Communication	USB
Outlets	2x French
Surge Protection	RJ-11, RJ-45 (in/out)

Software & System Requirements

Software	ViewPower
Operating System	For details visit: www.powerwalker.com/viewpower.html
Other	1x USB port

Product Details

Dimensions	328 x 100 x 145 mm
Colour	Black
Weight	5.2 kg
Model Code	VI 600 SW/FR

Environment

Temperature	0°C – 40°C
Humidity	0 – 90 % RH (non-condensing)

Package Content

Package Content	PowerWalker VI 600 SW/FR, Input Power Cord, IEC-Cable C13/C14, USB Cable, Control Software CD, Manual
------------------------	---

Logistic Data

Giftbox Language	EN/DE/FR/ES/IT/PT/SV/FI/NO/TR RU/UA/BY/PL/CZ/HR/HU/BG/KK/SR
Manual Language	EN/DE/FR/ES/IT/PT/RU/PL
Dimension/Giftbox	385 x 140 x 228 mm
Weight/Giftbox	tba
Dimension/Carton	tba
Weight/Carton	tba
Pieces/Carton	4
Pieces/Palette	128
Item Number	10120085
EAN	4260074976359
Warranty	24 Month (except battery)



Optional Accessory:
Yuasa 12V/7Ah battery
Datasheet: [Link](#)
CSB or Panasonic brand
can also be used

Version: EN 17/06/2014
We reserve the right for technical changes and mistakes

Use UPS configurator on www.powerwalker.com for detailed backup time information.