

Fume Extractor




QUICK TF9-S

▼ Features

- Large flow rate, strong suction, universal casters, bottom air inlet and side opening, for convenient installation, movement, maintenance and integration.
- User-friendly designs including LCD display, button lock, and with communication function to realize intelligent linkage control with equipment.
- Large flame-retardant organ-type dust bag can store more dust; detachable filters and smart filter reminder to ensure accurate filter replacement cycle, reducing waste of consumables.
- Air inlet is available in diameter of 75mm and 150mm, and with options of indoor and outdoor exhaust to choose from as needed. Suitable for equipment requiring air purification such as laser marking, PCB cutting, etc.


▼ Regular Accessories



Organ-type dust bag



Medium-efficiency/HEPA Filter



Activated Carbon Filter

▼ Details



Silent Universal casters



Enhanced lock



RS-485 Communication




PU Steel Wire Hose

▼ Specifications

Model	TF9-S
Power consumption	750W
System Flow	900m³/h
Voltage	220V AC
Static Pressure	3800Pa
Noise Level	< 75dB
Dimensions	450*514*830mm
Weight	About 52.3Kg

▼ Applications



PCB Marking




Laser Marking


▼ Inlet/Outlet Configurations



(Indoor exhaust)

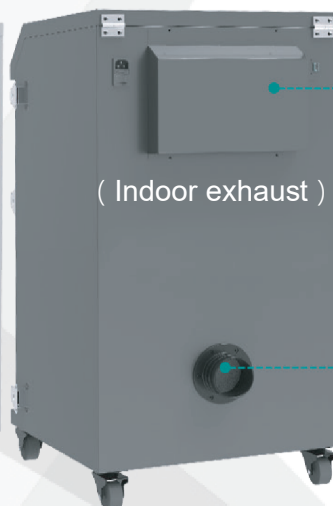


(Outdoor exhaust)



Outlet

Options including indoor exhaust and outdoor exhaust are available according to the environmental conditions.



(150mm/75mm)

Inlet

Can match with inlet hoses of different sizes.

- 1、Single Inlet 75mm*1
- 2、Double Inlets 75mm*2
- 3、Single Inlet 150mm*1