














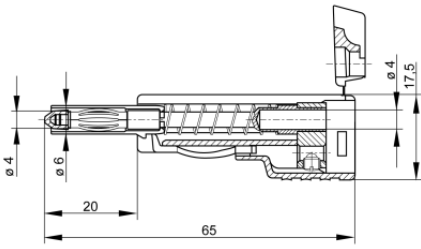


## Plugs

### SLS 200



Product	SLS 200										
description	<p>Contact protected plug with screw connection for cables up to 2.5 mm<sup>2</sup>, with onward connection capability (4 mm socket). Insulated by latching and sprung insulating sleeve, to be released by pressure on the lateral locking spring.</p> <p>plug with contact spring, 4mm diameter.</p> <p>*For this typ up to DC 150 V, CAT II according IEC/EN 61010-31 item 6.4., comment 4 allowed for devices with not yet protected sockets.</p>										
operating instruction	BA412										
article-no. / *colour	<p>9321531xx</p> <table style="width: 100%; text-align: center;"> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>00 black</td> <td>01 red</td> <td>02 blue</td> <td>03 yellow</td> <td>04 green</td> </tr> </table> <p style="text-align: right;"><b>Ni</b></p>						00 black	01 red	02 blue	03 yellow	04 green
											
00 black	01 red	02 blue	03 yellow	04 green							
drawing											
technical data											
connection	screw terminal										
rated voltage <sup>(1)</sup>	30 VAC / 60 VDC										
measurement cat. acc. to IEC 61010	O <sup>(3)</sup>										
rated current <sup>(1)</sup> (consider derating curve)	30 A										
material plug	brass, nickel plated										
housing material	PP										
temperature range acc. To IEC61010 <sup>(2)</sup>	-25 °C to +80 °C										

4 mm sliding sleeve system

inflammability class acc. to UL 94 (only valid for basic material of housing)	HB
--	----

<sup>(1)</sup> for normal environmental conditions 5°C to 40°C

<sup>(2)</sup> contact the manufacturer for applications at deviating temperature ranges

<sup>(3)</sup> without rated measurement category, for other circuits that are not directly connected to mains  
stand: 21.06.2022