



Fotowoltaika / Bezpieczniki 10x38mm 1000V DCgPV i podstawy rozłączalne

Wkładki topikowe cylindryczne 10x38 1000V DC gPV typ Z10 (2~20A) i HP10M (25A)

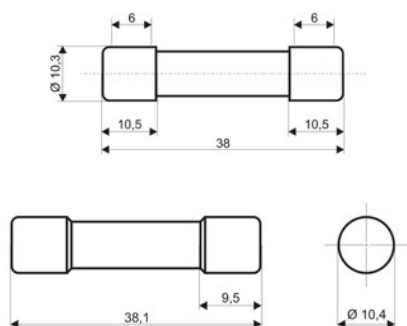

Typ	Un [V]	In [A]	Całk. Joule`a przeładunkowa $I^2_t [A^2s]$	Całk. Joule`a wyłączenia $I^2_t [A^2s]$	Straty mocy Pn [W]	Nr kat.
Z10DC2/1000V	1000	2	1,3	3,5	1,25	530011
Z10DC4/1000V	1000	4	4	13	1,25	530012
Z10DC6/1000V	1000	6	10	45	1,65	530013
Z10DC7/1000V	1000	7	13	57	1,92	530014
Z10DC8/1000V	1000	8	17	62	2	530015
Z10DC10/1000V	1000	10	21	88	2,3	530016
Z10DC12/1000V	1000	12	28	110	2,2	530019
Z10DC15/1000V	1000	15	33	260	2,4	530020
Z10DC16/1000V	1000	16	35	270	2,6	530021
Z10DC20/1000V	1000	20	50	430	3	530022
HP10M25	1000	25	b.d.	b.d.	1,2~2,9	530023

Podstawy rozłączalne Z10-TL.../E i Z10-TL do wkładek cylindrycznych 10x38 gPV

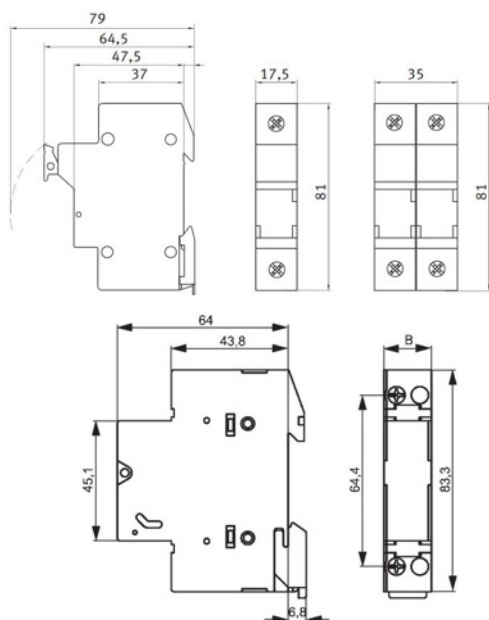

Typ	Liczba biegunów	Un [V]	In [A]	Wskaźnik	Nr kat.
Z10-TL1/DC000V	1	1000	25	-	530001
Z10-TL2/DC1000V	2	1000	25	-	530002
Z10-TL1/DC000V/E	1	1000	25	-	530003
Z10-TL2/DC000V/E	2	1000	25	-	530004

